



Report No.: ATJC23080380002000S

TEST REPORT

For
ROOF FANS

Model No. : DVR 280T, DVR 315T, DVR 355T, DVR 400T, DVR 450T, DVR 500T, DVR 560T, DVR 630T, DVR 710T, DVR 800T

Applicant : Univent For Industrial Eng Co
Abou rawash - Industrial zone - Behind smart village - Giza-
Egypt

Manufacturer : Shenzhen Chic Technology Co., Ltd.
No.507, Buidling 3rd, No.150 Huayue Road, Langkou
Community, Dalang Street, Longhua District Shenzhen.

Issued By : Shenzhen An-Teng Testing Service Co., Ltd.
Floor 5, No. 11, Hebei Industrial Zone, Hualian Community,
Longhua Street, Longhua District, Shenzhen, China.

Tel : +86 755 27724522

Fax : +86 755 27724533



Report Number : ATJC23080380002000S

Date of Test : Aug. 02 - Aug. 09, 2023

Issued Date : Aug. 09, 2023

Note:

This report shall not be reproduced except in full, without the written approval of Shenzhen An-Teng Testing Service Co., Ltd. This document may be altered or revised by Shenzhen An-Teng Testing Service Co., Ltd personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TEST REPORT EN 60335-2-80 Safety of household and similar electrical appliances Part 2-80: Particular requirements for fans	
Report Reference No..... : ATJC23080380002000S	
Name..... : Shenzhen An-Teng Testing Service Co., Ltd.	
Address..... : Floor 5, No. 11, Hebei Industrial Zone, Hualian Community, Longhua Street, Longhua District, Shenzhen, China.	
Testing location..... : Same as above	
Client	
Name..... : Univent For Industrial Eng Co	
Address..... : Abou rawash - Industrial zone - Behind smart village - Giza- Egypt	
Manufacturer..... : Shenzhen Chic Technology Co., Ltd.	
Address..... : No.507, Buidling 3rd, No.150 Huayue Road, Langkou Community, Dalang Street, Longhua District Shenzhen.	
Test specification	
Standard..... : EN 60335-1: 2012+A11: 2014+A1:2015+A2:2016 EN 60335-2-80: 2003+A1: 2004+A2: 2009 EN 62233: 2008	
Procedure deviation..... : N.A.	
Test Report Form Number..... : IEC 60335_2_80F Dated 2009-01	
Non-standard test method..... : N.A.	
Test item	
Description..... : ROOF FANS	
Trademark..... : UINIVENT	
Model and/or type reference..... : DVR 280T, DVR 315T, DVR 355T, DVR 400T, DVR 450T, DVR 500T, DVR 560T, DVR 630T, DVR 710T, DVR 800T	
Rating(s)..... : 380V~, 50Hz, 0.87-15.4A, 0.25-7.5kW	

Possible test case verdicts :

test case does not apply to the test object	N(/A.)
test object does meet the requirement	P(ass)
test object does not meet the requirement	F(ail)

Name and address of the testing laboratory :

Shenzhen An-Teng Testing Service Co., Ltd.
 Floor 5, No. 11, Hebei Industrial Zone, Hualian Community,
 Longhua Street, Longhua District, Shenzhen, China.

Tested by : Cris Song Aug. 09, 2023
 Signature Date
 Cris Song / Engineer

Reviewed by : Nico Liang Aug. 09, 2023
 Signature Date
 Nico Liang / Supervisor

Approved by : Henry Tian Aug. 09, 2023
 Signature Date
 Henry Tian / Manager




General remarks

This report shall not be reproduced except in full without the written approval of the testing laboratory.
 The test results presented in this report relate only to the item(s) tested.
 "(see remark #)" refers to a remark appended to the report.
 "(see Annex #)" refers to an annex appended to the report.
 Throughout this report a comma is used as the decimal separator.

General product information

1. This report covers DVR 280T, DVR 315T, DVR 355T, DVR 400T, DVR 450T, DVR 500T, DVR 560T, DVR 630T, DVR 710T, DVR 800T. All models in each series have similar mechanical and electrical construction, but different from model name, size and power.
2. All tests were conducted on one models DVR 280T are test result was pass.
3. This test report shall not be reproduced except in full without the written approval of the testing laboratory. The test results presented in this report relate only to the item tested. The test samples were pre-production without serial numbers.

Copy of marking plate

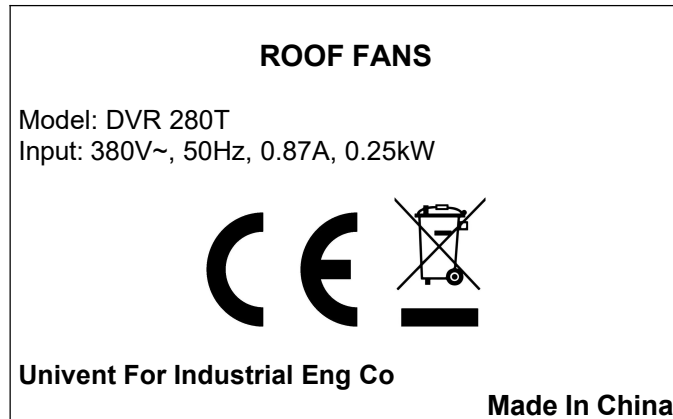

Summary of testing

The sample(s) tested complies with the requirements of EN 60335-1 and EN 60335-2-80.

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL CONDITIONS FOR THE TESTS		---
	Tests performed according to Cl. 5, e.g nature of supply, sequence of testing, etc. except the following clauses		P
6	CLASSIFICATION		---
6.1	- Protection against electric shock: Class 0, 0I, I, II, III.....:	Class I	P
6.2	Protection against harmful ingress of water	IP55	P
	Duct fans shall be at least IPX2 (EN 60335-2-80)		P
6.101	Fans shall be of one of the following classes with respect to climatic conditions (EN 60335-2-80)		P
	- fans for temperate climates;		P
	- fans for tropical climates		N
7	MARKING AND INSTRUCTIONS		---
7.1	Rated voltage or voltage range (V)	380Vac	P
	Single-phase appliances: 230 V covered		N
	Multi-phase appliances: 400 V covered		P
	Nature of supply	~	P
	Rated frequency or frequency range (Hz)	50Hz	P
	Rated input or rated current	7.5kW Max	P
	Manufacturer's or responsible vendor's name, trademark or identification mark	See cover page	P
	Model or type reference	See pages 1	P
	Symbol for Class II		N
	IP number	IP55	P
	Fans for tropical climates shall be marked with the letter "T" (EN 60335-2-80)		N
7.2	Warning for stationary appliances for multiple supply		P
	Warning placed in vicinity of terminal cover		P
7.3	Range of rated values correctly marked with the lower and upper limits separated by a hyphen		N
	Different rated values marked with the values separated by an oblique stroke		N
7.4	Appliances adjustable for different rated voltages, the voltage setting is clearly discernible	No such adjusting device	N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
7.5	Appliances with more than one rated voltage or one or more than voltage ranges, marked with rated input or rated current for each rated voltage or range, unless		P
	The power input is related to the mean value of the rated voltage range		P
	Relation between marking for upper and lower limits of rated power input or rated current and voltage is clear		N
7.6	Correct symbols used		P
7.7	Connection diagram fixed to appliances to be connected to more than two supply conductors and appliances for multiple supply		N
7.8	Except for type Z attachment, terminals for connection to the supply mains indicated as follows:		---
	- marking of terminals exclusively for the neutral conductor (N)		P
	- marking of protective earthing terminals(symbol 5019 of IEC 60417)		P
	- marking not placed on removable parts		P
7.9	Marking or placing of switches which may cause a hazard		N
7.10	Indications of switches on stationary appliances and controls on all appliances by use of figures, letters or other visual means		P
	The figure 0 indicates only OFF position, unless no confusion with the OFF position		N
7.11	Indication for direction of adjustment of controls		P
7.12	Instructions for safe use provided		P
7.12.1	Sufficient details for installation supplied		P
	The instructions for installation shall state (EN 60335-2-80)		N
	- the model or type reference of luminaries which may be installed in fans which are constructed for this purpose	No luminaries	N
	- partition fans, if the fan is intended for mounting in outside windows or walls		N
	- for fans intended to be mounted at high level, that the fan is to be installed so that the blades are more than 2,3 m above the floor		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- for duct and partition fans, that precautions must be taken to avoid the back-flow of gases into the room from the open flue of gas or other open-fire appliances		N
7.12.2	Stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III, the instructions state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules		N
7.12.3	Insulation of the fixed wiring in contact with parts exceeding 50K during clause II; instructions stating that the fixed wiring must be protected		N
7.12.4	Instructions for built-in appliance:		---
	- dimensions of space		N
	- dimensions and position of supporting means		N
	- distances between parts and surrounding structure		N
	- dimensions of ventilation openings and arrangement		N
	- connection to supply mains and interconnection of separate components		N
	- plug accessible after installation, unless		N
	- a switch complying with 24.3		N
7.12.5	Replacement cord instructions, type X attachment with a specially prepared cord		N
	Replacement cord instructions, type Y attachment		P
	Replacement cord instructions, type Z attachment		N
7.13	Instructions and other texts in an official language	English checked	P
7.14	Marking clearly legible and durable	Rubbed the marking by hand for 15 s with a piece of cloth soaked with water and again for 15 s with a piece of cloth soaked with petroleum spirit	P
7.15	Marking on a main part		P
	Marking clearly discernible from the outside, if necessary after removal of a cover	Clearly discernible from the outside	P
	For portable appliances, cover can be removed or opened without a tool		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	For stationary appliances, name, trademark or identification mark and model or type reference visible after installation		N
	For fixed appliances, name, trademark or identification mark and model or type reference visible after installation according to the instructions		N
	Indications for switches and controls placed on or near the components. Marking not on parts which can be positioned or repositioned in such a way that the marking is misleading	Placed near the components	P
7.16	Marking of a possible replaceable thermal link or fuse link clearly visible with regard to replacing the link	No possible replaceable thermal link and fuse link used	N
8	PROTECTION AGAINST ACCESS TO LIVE PARTS		---
8.1	Adequate protection against accidental contact with live parts		P
8.1.1	Requirements applies for all positions, detachable parts removed		P
	Insertion or removal of lamps, protection against contact with live parts of the lamp cap		P
	Use of test probe B of IEC 61032:no contact with live parts		P
8.1.2	Use of test probe 13 of IEC 61032 through openings in class 0 appliances and class II appliances/constructions		N
	Test probe 13 also applied through openings in earthed metal enclosures having a non-conductive coating: no contact with live parts		N
8.1.3	For appliances other than class II, use of test probe 41 of IEC 61032:no contact with live parts of visible glowing heating elements		N
8.1.4	Accessible part not considered live if:		---
	- safety extra-low a.c. voltage: peak values not exceeding 42.4 V		N
	- safety extra-low d.c. voltage: not exceeding 42.4 V		N
	- or separated from live parts by protective impedance		N
	If protective impedance : d.c. current not exceeding 2mA, and		N
	a.c. peak value not exceeding 0.7mA		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- for peak value 42,4 V up to and including 450 V capacitance not exceeding 0,1 μ F		N
	- for peak value over 450 V up to and including 15 kV, discharge not exceeding 45 μ C		N
8.1.5	Live parts protected at least by basic insulation before installation or assembly :		---
	- built-in appliances		N
	- fixed appliances		N
	- appliances delivered in separate units		N
8.2	Class II appliances and constructions constructed so that there is adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		N
	Only possible to touch parts separated from live parts by double or reinforced insulation		N
10	POWER INPUT AND CURRENT		---
10.1	Power input at normal operating temperature, rated voltage and normal operation not deviating from rated power input by more than shown in table 1	(See appended table)	P
	Fans incorporating shutters or similar devices are tested with these in the open position (EN 60335-2-80)	No shutter and similar devices	N
10.2	Current at normal operating temperature, rated voltage and normal operation not deviating from rated current by more than shown in table 2		N
	Fans incorporating shutters or similar devices are tested with these in these in the open position (EN 60335-2-80)	No shutter and similar devices	N
11	HEATING		---
11.1	No excessive temperatures in normal use		P
11.2	Placing and mounting of appliance as described		P
11.3	Temperature rises, other than of windings, determined by thermocouples		P
	Temperature rises of windings determined by resistance method, unless	Winding of motor determined by resistance method	P
	The windings makes it difficult to make the necessary connections		N
11.4	Heating appliances operated under normal operation at 1,15 times rated power input	No heating element	N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
11.5	Motor-operated appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage		P
11.6	Combined appliances operated under normal operation at most unfavourable voltage between 0,94 and 1,06 times rated voltage		N
11.7	Fans are operated until steady conditions are established (EN 60335-2-80)		P
11.8	Temperature rises not exceeding values in table 3	(see appended table)	P
	The temperature rise limits for fans for tropical climates are reduced by 15 K (EN 60335-2-80)		N
	Protective devices do not operate		P
	Sealing compound does not flow out		N
13	LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE		---
13.1	Leakage current not excessive and electric strength adequate		P
	Heating appliances operated at 1.15 times rated power input		N
	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage		P
	Protective impedance and radio interference filters disconnected before carrying out the tests		N
13.2	Leakage current measured by means of circuit described in figure 4 of IEC 60990		P
	Leakage current measurements	(see appended table)	P
13.3	Electric strength test according to table 4	(see appended table)	P
	No breakdown during the test		P
14	TRANSIENT OVERVOLTAGES		---
	Appliances withstand the transient overvoltages to which they may be subjected		N
	Clearances having a value less than specified in table 16 subjected to an impulse voltage test, the test voltage specified in table 6		N
	No flashover during the test, unless of functional insulation		N
	In case of flashover of functional insulation, the appliance complies with clause 19 with the clearance short circuited		N
15	MOISTURE RESISTANCE		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
15.1	Enclosure provides the degree of moisture protection according to classification of appliance	IPX5	P
	Compliance checked as specified in 15.1.1, taking into account 15.1.2, followed by the electric strength test of 16.3		P
	No trace of water on insulation which can result in a reduction of clearances and creepage distance below values specified in clause 29		P
15.1.1	Appliances, other than IPXO, subjected to tests as specified in IEC 60529.....:		P
	The outer part of fans intended to be mounted in outside windows and walls is subjected to the test of 14.2.4 of IEC 60529, the part of the fan which is not mounted on the outside of the window or wall being protected against spray from the oscillating tube. The fan is tested at rest and then supplied at rated voltage and operated with the shutters or similar devices in the open position (EN 60335-2-80)		P
	Duct fans are subjected to the test of 14.2.2 of IEC 60529 at rest and then in operation while supplied at rated voltage (EN 60335-2-80)		N
15.1.2	Hand-held appliance turned continuously through the most unfavourable positions during the test		N
	Built-in appliance installed according to the instruction		N
	Appliances placed or used on the floor table placed on a horizontal unperforated support		N
	Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted on a wooden board		N
	For IPX3 appliances, the base of wall mounted appliances is placed at the same level as the pivot axis of the oscillating tube		N
	For IPX4 appliances, the horizontal centre line of the appliances is aligned with the pivot axis of the oscillating tube		N
	However, for appliances normally used on the floor or table, the movement is limited to two times 90° for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube		N
	Wall-mounted appliances, take into account the distance to the floor stated in the instructions		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Appliances with type X attachment fitted with a flexible cord as described		N
	Detachable parts tests as specified		N
15.2	Spillage of liquid does not affect the electrical insulation		N
	Appliances with type X attachment fitted with a flexible cord as described		N
	Appliance incorporating an appliance inlet tested with or without an connector, whichever is most unfavourable		N
	Detachable parts removed		N
	Appliances supplied at rated voltage and operated for 15 s with the solution still in the container: the leakage current shall not exceed the values specified in clause 13		N
	Saline solution is then added to the liquid container until it is completely full again. A further quantity equal to 15% of the capacity of the cotainer or 0.25 l is poured in steadily over a period of 1 min		N
	The appliance withstands the electrics strength test of 16.3		N
	No trace of water on insulation which can result in reduction of distances and clearances below values specified in 29		N
15.3	Appliance proof against humid conditions		P
	Humidity treatment for 48 h	25°C, 93%RH	P
	The appliance withstands the test of Cl. 16		P
16	LEAKAGE CURRENT AND ELECTRIC STRENGTH		---
16.1	Leakage current not excessive and electric strength adequate		P
	Protective impedance disconnected from live parts before carrying out the tests		N
16.2	Single-phase appliance: test voltage 1.06 times rated voltage.....		N
	Three-phase appliances: test voltage 1.06 times rated voltage divided by $\sqrt{3}$	AC380V \times 1.06	P
	Leakage current measurements	(see appended table)	P
16.3	Electric strength tests according to table 7	(see appended table)	P
	No breakdown during the tests		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS		---
	No excessive temperatures in transformer or associated circuits in event of short-circuits likely to occur in normal use		N
	Appliance supplied with 1.06 or 0.94 times rated voltage and the most unfavourable short-circuit or overload likely to occur in normal use applied:		N
	Temperature rise of insulation of the conductors of safety extra-low voltage circuits not exceeding the relevant value specified in table 3 by more than 15 K		N
	Temperature of the winding not exceeding the value specified in table 8	(see appended table)	N
	However limits do not apply to fail-safe transformers complying with sub-clause 15.5 of IEC 61558-1		N
19	ABNORMAL OPERATION		---
19.1	The risk of fire or mechanical damage under abnormal or careless operation obviated		P
	Electronic circuits so designed and applied that a fault not render the appliance unsafe		N
	Fans incorporating shutters or similar devices operated by a control are also subjected to the test of 19.101 (EN 60335-2-80)	No shutters and similar devices	N
19.2	Test of appliance with heating elements with restricted heat dissipation; test voltage (V): power input of 0,85 times rated power input	No heating elements	N
19.3	Test of 19.2 repeated; test voltage (V): power input of 1,24 times rated power input	Ditto	N
19.4	Test conditions as in cl. 11, any control limiting the temperature during tests of cl. 11 short-circuited	Ditto	N
19.5	Test of 19.4 repeated on Class 0I and I appliances with tubular sheathed or embedded heating elements. No short-circuiting, but one end of the element connected to the elements sheath	Ditto	N
	The test repeated with reversed polarity and the other end of the heating element connected to the sheath		N
	The test is not carried out on appliances intended to be permanently connected to fixed wiring and on appliances where an all-pole disconnection occurs during the test of 19.4		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
19.6	Appliances with PTC heating elements tested at rated voltage, establishing steady conditions	Ditto	N
	The working voltage of the PTC heating element is increased by 5% and the appliance is operated until steady conditions are re-established. The voltage is then increased in similar steps until 1.5 times working voltage or until the PTC heating element ruptures		N
19.7	Stalling test by locking the rotor if the locked rotor torque is smaller than the full load torque or locking moving parts of other appliances	See appended table	P
	Locked rotor, motor capacitors open circuited or short-circuited, if required		N
	Locked rotor, capacitors open-circuited one at a time		N
	Test repeated with capacitors short-circuited one at a time, if required		N
	Appliances with timer or controller supplied with rated voltage for each of the tests, for a period equal to the maximum period allowed		N
	Other appliances supplied with rated voltage for a period as specified	Until steady conditions established	P
	Winding temperatures not exceeding values specified in table 8		P
	Separate controls are mounted on a dull-black painted plywood board. Approximately 50 % of the area of each ventilating opening is blocked. The temperature of windings shall not exceed the values of table 6 and the temperature of the board shall not exceed 90°C (EN 60335-2-80)	No separate controls	N
19.8	Three-phase motors operated at rated voltage with one phase disconnected		N
19.10	Series motor operated at 1.3 times rated voltage for 1 min.....:	Not series motor	N
	During the test, parts shall not be ejected from the appliance		N
19.11	Electronic circuits, compliance checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1	No electronic circuits	N
19.11.1	Before applying the fault conditions a) to f) in 19.11.2, it is checked if circuits or parts of circuit meet both of the following conditions:		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- the electronic circuit is a low-power circuit, that is, the maximum power at low-power points does not exceed 15 W according to the tests specified		N
	- the protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction in other parts of the appliance does not rely on the correct functioning of the electronic circuit		N
19.11.2	Fault conditions applied one at a time, the appliance operated under conditions specified in Cl. 11, but supplied at rated voltage, the duration of the tests as specified:		---
	a) short-circuit of functional insulation if clearances or creepage distances are less than the values specified in 29		N
	b) open circuit at the terminals of any component		N
	c) short-circuit of capacitors, unless they comply with IEC 60384-14		N
	d) short-circuit of any two terminals of an electronic component, other than integrated circuits. This fault condition is not applied between the two circuits of an optocoupler		N
	e) failure of triacs in the diode mode		N
	f) failure of an integrated circuit. The possible hazardous situations of the appliance are assessed to ensure that safety dose not rely on the correct functioning of such a component		N
19.11.3	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with clause 19, the relevant test is repeated with a single fault simulated, as indicated in a) to f) of 19.11.2		N
	During and after each test the following is checked:		---
	-the temperature rises of the windings do not exceed the values specified in table 8		N
	-the appliance complies with the conditions specified in 19.13		N
	-any current flowing through protective impedance not exceeding the limits specified in 8.1.4		N
	If a conductor of a printed board becomes open-circuited, the appliance is considered to have withstood the particular test, provided all three of the following conditions are met:		---
	-the material of the printed circuit board withstands the burning test of annex E		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	-any loosened conductor does not reduce the clearances or creepage distances between live parts and accessible metal parts below the values specified in cl.29		N
	-the appliance withstands the tests of 19.11.2 with open-circuited conductor bridged		N
19.12	If the safety of the appliance for any of the fault conditions specified in 19.11.2 depends on the operation of a miniature fuse-link complying with IEC 60127, the test is repeated, measuring the current flowing through the fuse-link; measured current(A); rated current of the fuse-link(A).....:		N
19.13	During the tests the appliance does not emit flames, molten metal, poisonous or ignitable gas in hazardous amounts		P
	Temperature rises not exceeding the values shown in table 9	(see appended table)	P
	Enclosures not deformed to such an extent that compliance with cl.8 is impaired		P
	If the appliance can still be operated it complies with 20.2		P
	Insulation, other than of class III appliance, withstand the electric strength test of 16.3, the test voltage specified in table 4:		---
	- basic insulation.....:		N
	- supplementary insulation.....:	1906V	P
	- reinforced insulation.....:		N
19.101	Fans incorporating shutters or similar devices which are operated automatically are supplied at rated voltage and operated with the shutters or similar devices held in the closed or open position, whichever is more unfavourable (EN 60335-2-80)	No shutters and similar devices	N
20	STABILITY AND MECHANICAL HAZARDS		---
20.1	Adequate stability		P
	Portable pedestal fans having a height exceeding 1,7 m and a mass exceeding 10 kg are placed on a horizontal surface. A horizontal force of 40 N is applied to the fan at a height of 1,5 m. the fan shall not overturn (EN 60335-2-80)		N
20.2	Moving parts adequately arranged or enclosed as to provide protection against personal injury		P
	Protective enclosures, guards and similar parts are non-detachable		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Adequate mechanical strength and fixing of protective enclosures		P
	Self-resetting thermal cut-outs and overcurrent protective devices not causing a hazard, by unexpected reclosure		N
	Not possible to touch dangerous moving parts with test probe		P
20.101	Fan blades, other than those of fans for mounting at high level shall be guarded unless their leading edges and tips are rounded and (EN 60335-2-80)	Protected by enclosure	P
	- they have a hardness less than D 60 Shore, or		N
	- they have a peripheral speed less than 185 m/s when the fan is supplied at rated voltage, or		N
	- the fan has a power output not exceeding 2 W when supplied at rated voltage		N
	Guards are subjected to a push and pull force of 20 N applied along the axis of the fan motor. After the test, it shall not be possible to touch dangerous moving parts with the finger used for the test of 20.2		N
21	MECHANICAL STRENGTH		---
	Appliance has adequate mechanical strength and is constructed as to withstand rough handling		P
	No damage after three blows applied to various parts of the enclosure	Impact energy 0,5 ± 0,04 J	P
	Test also carried out on detachable parts that are necessary for protection against mechanical hazards		N
	If necessary, supplementary or reinforced insulation subjected to the electric strength test of 16.3		N
	If necessary, repetition of groups of three blows on a new sample		N
21.101	Ceiling fans shall have adequate strength (EN 60335-2-80)		N
	Ceiling fans are mounted in accordance with the instructions for installation. A load equal to four times the mass of the fan is suspended from the body of the fan. The load is applied for 1 min		N
	A torque of 1 Nm is then applied to the fixed body of the fan for 1 min. the test is repeated with the torque applied in the reverse direction		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	The suspension system shall not break and the fan shall not be damage to such an extent that compliance with 8.1, 16.3 and 29.1 is impaired		N
22	CONSTRUCTION		---
22.1	Appliance marked with the first numeral of the IP system, relevant requirements of IEC 60529 are fulfilled	IP55	P
22.2	Stationary appliance: means to provide all-pole disconnection from the supply provided, the following means being available:		---
	- a supply cord fitted with a plug	Not stationary appliance	N
	- a switch complying with 24.3		N
	- a statement in the instruction sheet that a disconnection incorporated in the fixed wiring is to be provided		N
	- an appliance inlet		N
	Single-pole switches and single-pole protective devices for the disconnection of heating elements in single-phase permanently connected class I appliances, connected in the phase conductor		N
22.3	Appliance provided with pins: no undue strain on socket-outlets		P
	Applied torque not exceeding 0.25 Nm		P
	Pull force of 50N to each pin after the appliance has being placed in the heating cabinet; when cooled to room temperature the pins are not displaced by more than 1mm		P
	Each pin subjected to a torque of 0.4Nm; the pins are not rotating unless rotating does not impair compliance with the standard		N
22.4	Appliance for heating liquids and appliance causing undue vibration not provided with pins for insertion into socket-outlets		N
22.5	No risk of electric shock when touching the pins of the plug		N
22.6	Electrical insulation not affected by condensing water or leaking liquid		N
	Electrical insulation of Class II appliances not affected in case of a hose rupture or seal leak		N
22.7	Appliances containing liquid or gases in normal use or having steam-producing devices shall incorporate adequate safeguards against the risk of excessive pressure		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
22.8	Electrical connections not subject to pulling during cleaning of compartments to which access can be gained without the aid of a tool, and that are likely to be cleaned in normal use		N
22.9	Insulation, internal wiring, windings, commutators and slip rings not exposed to oil, grease or similar substances	No oil, grease and similar substances used	N
	Adequate insulating properties of oil or grease to which insulation is exposed		N
22.10	Location or protection of reset buttons of non-self-resetting controls is so that accidental resetting is unlikely	No non-self-resetting controls	N
22.11	Reliable fixing of non-detachable parts that provide the necessary degree of protection against electric shock, moisture or contact with moving parts	Screws used for fixing such parts	P
	Obvious locked position of snap-in devices used for fixing such parts	No snap-in devices	N
	No deterioration of the fixing properties of snap-in devices used in parts that are likely to be removed during installation or servicing		N
	Tests as described		N
	The 50 N force is not applied to clips used to fasten fan guards. Instead, a force of 15 N is applied in any direction to the clips in an attempt to release them (EN 60335-2-80)		N
22.12	Handles, knobs etc. fixed in a reliable manner		P
	Fixing in wrong position of handles, knobs etc. indicating position of switches or similar components not possible		N
	Compliance is checked by inspection and test		P
22.13	Unlikely that handles, when gripped as in normal use, make the operators hand touch parts having a temperature rise exceeding the value specified for handles which are held for short periods only		N
22.14	No ragged or sharp edges creating a hazard for the user in normal use, or during user maintenance		P
	No exposed pointed ends of self tapping screws etc., liable to be touched by the user in normal use or during user maintenance		P
22.15	Storage hooks and the like for flexible cords smooth and well rounded	No storage hooks used	N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
22.16	Automatic cord reels cause no undue abrasion or damage to the sheath of the flexible cord, no breakage of conductors strands, no undue wear of contacts	No automatic cord reels used	N
	Cord reel tested with 6000 operations, as specified		N
	Electric strength test of 16.3, voltage of 1000 V applied		N
22.17	Spacers not removable from the outside by hand or by means of a screwdriver or a spanner		N
22.18	Current-carrying parts and other metal parts resistant to corrosion under normal conditions of use		P
22.19	Driving belts not used as electrical insulation	No driving belts	N
22.20	Direct contact between live parts and thermal insulation effectively prevented, unless material used is non-corrosive, non-hygroscopic and non-combustible		N
	Compliance is checked by inspection and, if necessary, by appropriate test		N
22.21	Wood, cotton, silk, ordinary paper and fibrous or hygroscopic material not used as insulation, unless impregnated		P
22.22	Appliance not containing asbestos		P
22.23	Oils containing polychlorinated biphenyl (PCB) not used		P
22.24	Bare heating elements adequately supported	No heating elements	N
	In case of rupture, the heating conductor is unlikely to come in contact with accessible metal parts		N
22.25	Sagging heating conductors cannot come into contact with accessible metal parts		N
22.26	The insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double or reinforced insulation	All parts operated at mains supply	N
22.27	Parts connected by protective impedance separated by double or reinforced insulation		N
22.28	Metal parts of Class II appliances conductively connected to gas pipes or in contact with water: separated from live parts by double or reinforced insulation		P

EN 60335-2-80

Clause	Requirement + Test	Result - Remark	Verdict
22.29	Class II appliances permanently connected to fixed wiring so constructed that the required degree of access to live parts is maintained after installation		P
22.30	Parts serving as supplementary or reinforced insulation fixed so that they cannot be removed without being seriously damaged, or		P
	so constructed that they cannot be replaced in an incorrect position, and so that if they are omitted, the appliance is rendered inoperable or manifestly incomplete		P
22.31	Creepage distances and clearances over supplementary and reinforced insulation not reduced below values specified for supplementary insulation		P
22.32	Supplementary and reinforced insulation designed or protected against deposition of dirt or dust		P
	Supplementary insulation of natural or synthetic rubber resistant to ageing, or arranged and dimensioned so that creepage distances are not reduced below values specified in 29.2		P
	Ceramic material not tightly sintered, similar material or beads alone not used as supplementary or reinforced insulation	No such material used as supplementary or reinforced insulation	N
	Oxygen bomb test at 70°C for 96 h and 16 h at room temperature		N
22.33	Conductive liquids which are or may become accessible in normal use are not in direct contact with live parts	No conductive liquids	N
	Electrodes not used for heating liquids		N
	For class II constructions, conductive liquids that are or may become accessible in normal use, not in direct contact basic or reinforced insulation		N
	For class II construction, Conductive liquids which are in contact with live parts, not in direct contact with reinforced insulation		N
22.34	Shafts of operating knobs, handles, levers etc. not live, unless the shaft is not accessible when the part is removed		P
22.35	Handles, levers and knobs, held or actuated in normal use, not becoming live in the event of an insulation fault		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Such parts being of metal, and their shafts or fixings are likely to become live in the event of an insulation fault, they are either adequately covered by insulation material, or their accessible parts are separated from their shafts or fixings by supplementary insulation		N
	This requirement does not apply to handles, levers and knobs on stationary appliances other than those of electrical components, provided they are either reliably connected to an earthing terminal or earthing contact, or separated from live parts by earthed metal		N
22.36	Handles continuously held in the hand in normal use are so constructed that when gripped as in normal use, the operators hand is not likely to touch metal parts, unless they are separated from live parts by double or reinforced insulation	No such handles	N
22.37	Capacitors in Class II appliances not connected to accessible metal parts, unless complying with 22.42		N
	Metal casings of capacitors in Class II appliances separated from accessible metal parts by supplementary insulation, unless complying with 22.42		N
22.38	Capacitors not connected between the contacts of a thermal cut-out		N
22.39	Lamp holders only used for the connection of lamps	No lamp holders	N
22.40	Motor-operated appliances and combined appliances, intended to be moved while in operation or which have accessible moving parts, are fitted with a switch to control the motor, the actuating member of the switch being easily visible and accessible		N
22.41	No components, other than lamps, containing mercury		P
22.42	Protective impedance consisting of at least two separate components		N
	Values specified in 8.1.4 not exceeded if any one of the components is short-circuited or open circuited		N
22.43	Appliances adjustable for different voltages, accidental changing of the setting of the voltage unlikely to occur	No such devices	N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
22.44	Appliance are not allowed to have an enclosure that is shaped and decorated so that the appliance is likely to be treated as a toy by children		P
22.45	When air is used as reinforced insulation, clearances not reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure		P
22.101	Thermal cut-outs incorporated in duct fans in order to comply with clause 19 shall be non-self-resetting (EN 60335-2-80)		N
22.102	Fans having provision for attaching a luminaire shall incorporate appropriate terminals and internal wiring (EN 60335-2-80)		N
22.103	Electrical insulation for which clearances and creepage distances are specified shall not be located in air ducts unless adequate precautions are taken to reduce the effects of contamination (EN 60335-2-80)		P
23	INTERNAL WIRING		---
23.1	Wireways smooth and free from sharp edges		P
	Wires protected against contact with burrs, cooling fins etc.		N
	Wire holes in metal well rounded or provided with bushings	Internal wiring not passed through metal parts	N
	Wiring effectively prevented from coming into contact with moving parts		P
23.2	Beads etc. on live wires cannot change their position, and are not resting on sharp edges or corners		N
	Beads inside flexible metal conduits contained within an insulating sleeve		N
23.3	Electrical connections and internal conductors movable relatively to each other not exposed to undue stress		P
	Flexible metallic tubes not causing damage to insulation of conductors		N
	Open-coil springs not used		N
	Adequate insulating lining provided inside a coiled spring, the turns of which touch one another		N
	Electric strength test, 1000 V between live parts and metal parts		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Instead of moving the movable part backwards and forwards, the following applies: fans with an oscillating member are supplied at rated voltage and operated under normal operation, the angle of oscillation being the maximum permitted by the construction. The test is carried out for 100000 cycles of oscillation (EN 60335-2-80)		N
23.4	Bare internal wiring sufficiently rigid and fixed	No bare internal wiring	N
23.5	The insulation of internal wiring withstanding the electrical stress likely to occur in normal use		P
23.6	Sleeving used as supplementary insulation on internal wiring retained in position by positive means		P
23.7	Only the colour combination green/yellow used for earthing conductors		P
23.8	Aluminium wires not used for internal wiring	No aluminium wires	P
23.9	No lead-tin soldering of stranded conductors where they are subject to contact pressure, unless		P
	clamping means so constructed that there is no risk of bad contact due to cold flow of the solder		N
24	COMPONENTS		---
24.1	Components comply with safety requirements in relevant IEC standards		P
	List of components	(see appended table)	P
	Components not tested and found to comply with relevant IEC standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.6		P
	Components not tested and found to comply with relevant IEC standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
24.1.1	Capacitors likely to be subjected to the supply mains voltage and used for radio interference suppression or voltage dividing, comply with IEC 60384-14, or		N
	Tested according to annex F		N
24.1.2	Safety isolating transformers comply with IEC 61558-2-6, or		N
	Tested according to annex G		N
24.1.3	Switches: compliance with IEC 61058, unless tested with the appliance		P

EN 60335-2-80

Clause	Requirement + Test	Result - Remark	Verdict
24.1.4	Automatic controls complying with IEC 60730-1 with relevant part 2. The number of cycles operation being:		N
	- thermostats: 10 000		N
	- temperature limiters: 1000		N
	- self-resetting thermal cut-outs: 300		N
	- non-self-resetting thermal cut-outs: 30		N
	- timers: 3000		N
	- energy regulators: 10 000		N
24.1.5	Appliance couplers: complying with IEC 60320-1		N
	However, appliance classified higher than IPX0, the appliance couplers complying with IEC 60320-2-3		N
24.1.6	Small lamp holder similar to E10 lampholders complying with IEC 60238, the requirements for E10 lampholders being applicable	No lamp holder	N
24.2	No switches or automatic controls in flexible cords		P
	No devices causing the protective device in the fixed wiring to operate in the event of a fault in the appliance		P
	No thermal cut-outs which can be reset by soldering		P
	Appliances having a rated power input not exceeding 25 W may be fitted with a switch in the supply cord (EN 60335-2-80)		N
24.3	Switch intended for all-pole disconnection of stationary appliances is directly connected to the supply terminals and having a contact separation in all pole, providing full disconnection under overvoltage category III conditions		N
24.4	Plugs and socket-outlets for extra-low voltage circuits and heating elements, not interchangeable with plugs, and socket-outlets listed in IEC 60083 or IEC 60906-1 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1		N
24.5	Capacitors in auxiliary winding of motors marked with their rated voltage and capacitance and used accordingly		P
	Voltage across capacitors in series with a motor winding does not exceed 1,1 times rated voltage, when the appliance is supplied at 1,1 times rated voltage under minimum load		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
24.6	Working voltage of Motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V		N
	In addition, the motors are complying with requirements of Annex I		N
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		---
25.1	Appliance not intended for permanent connection to fixed wiring, means for connection to the supply:		---
	- supply cord fitted with a plug		P
	- an appliance inlet having at least the same degree of protection against moisture as required for the appliance		N
	- pins for insertion into socket-outlets		N
25.2	Appliance not provided with more than one means of connection to the supply mains		P
	Stationary appliance for multiple supply may be provided with more than one means of connection, provided electric strength test of 1250 V for 1 min between each means of connection causes no breakdown		N
25.3	Connection of supply wires for appliance intended to be permanently connected to fixed wiring possible after the appliance has been fixed to its support	Not intended to be permanently connected to fixed wiring	N
	Appliance provided with a set of terminals for the connection of cables or fixed wiring, cross-sectional areas specified in 26.6		N
	Appliance provided with a set of terminals allowing the connection of a flexible cord		N
	Appliance provided with a set of supply leads accommodated in a suitable compartment		N
	Appliance provided with a set of terminals and cable entries, conduit entries, knock-outs or glands, allowing connection of appropriate type of cable or conduit		N
25.4	Cable and conduit entries, rated current of appliance not exceeding 16 A, dimensions according to table 10	As above, no such requirement	N
	Introduction of conduit or cable does not affect the protection against electric shock or reduce creepage distances and clearances below values specified in 29		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
25.5	Method for assemble supply cord with the appliance:		---
	- type X attachment		N
	- type Y attachment		P
	- type Z attachment, if allowed in the relevant part 2		N
	Type X attachments, other than those having a specially prepared cord, shall not used for flat twin tinsel cords		N
	Type Z attachment is allowed for portable fans (EN 60335-2-80)		N
25.6	Plugs fitted with only one flexible cord		P
25.7	Appliance supply cord not lighter than:		---
	- braided cord (245 IEC 51)		N
	- ordinary tough rubber sheathed cord (60245 IEC 53)		N
	- flat twin tinsel cord (60227 IEC 41)		N
	- light polyvinyl chloride sheathed cord (60227 IEC 52), appliance not exceeding 3 kg		N
	- ordinary polyvinyl chloride sheathed cord (60227 IEC 53), appliance exceeding 3 kg		N
	Temperature rise of external metal parts exceeding 75 K, PVC cord not used, unless		N
	appliance so constructed that the supply cord is not likely to touch external metal parts in normal use, or		N
	The supply cord is appropriate for higher temperatures, type Y or type Z attachment used		N
25.8	Nominal cross-sectional area of supply cords according to table 9; rated current (A); cross-sectional area (mm ²).....:	Not this type	N
25.9	Supply cord not in contact with sharp points or edges	Not this type	N
25.10	Green/yellow core for earthing purposes in Class I appliance		P
25.11	Conductors of supply cords not consolidated by lead-tin soldering where they are subject to contact pressure, unless		N
	clamping means so constructed that there is no risk of bad contacts due to cold flow of the solder		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
25.12	Moulding the cord to part of the enclosure does not damage the insulation of the supply cord		N
25.13	Inlet opening so shaped as to prevent damage to the supply cord		N
	Unless the enclosure at the inlet opening is of insulation material, a non-detachable lining or bushing complying with 29.3 for supplementary insulation provided		N
	If unsheathed supply cord, a similar additional bushing or lining is required, unless		N
	The appliance is class 0		N
25.14	Supply cords adequately protected against excessive flexing		P
	Flexing test:		---
	-applied force (N):		N
	-number of flexings:		N
	The test does not result in:		---
	- short-circuit between the conductors		N
	- breakage of more than 10% of the strands of any conductor		N
	- separation of the conductor from its terminal		N
	- loosening of any cord guard		N
	- damage, within the meaning of the standard, to the cord or the cord guard		N
	- broken strands piercing the insulation and becoming accessible		N
25.15	Conductors of the supply cord relieved from strain, twisting and abrasion by use of cord anchorages	Not Applicable	N
	The cord cannot be pushed into the appliance to such an extent that the cord or internal parts of the appliance can be damaged		N
	Pull and torque test of supply cord, values shown in table 12: pull (N); torque (Nm) (not on automatic cord reel)		N
	Max. 2 mm displacement of the cord, and conductors not moved more than 1 mm in the terminals		N
	Creepage distances and clearances not reduced below values specified in 29.1		P
25.16	Cord anchorages for type X attachments so constructed and located so that:		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- replacement of the cord is easily possible	Type Y attachment	N
	- it is clear how the relief from strain and the prevention of twisting are obtained		N
	- they are suitable for different types of cord, unless the cord is specially prepared.		N
	- cord cannot touch the clamping screws of cord anchorage if these screws are accessible, unless separated from accessible metal parts by supplementary insulation		N
	- the cord is not clamped by a metal screw which bears directly on the cord		N
	- at least one part of the cord anchorage securely fixed to the appliance, unless part of a specially prepared cord		N
	- screws which have to be operated when replacing the cord do not fix any other component, if applicable		N
	- if labyrinths can be bypassed the test of 25.15 is nevertheless withstood		N
	- for Class 0, 0I and I appliances: they are of insulating material or are provided with an insulating lining, unless a failure of the insulation of the cord does not make accessible metal parts live		N
	- for Class II appliances: they are of insulating material, or if of metal, they are insulated from accessible metal parts by supplementary insulation		N
25.17	Adequate cord anchorages for type Y and Z attachment		P
25.18	Cord anchorages only accessible with the aid of a tool, or		P
	so constructed that the cord only can be fitted with the aid of a tool		N
25.19	Type X attachment, glands not used as cord anchorage in portable appliances	Type Y attachment	N
	Tying the cord into a knot or tying the cord with string not used		N
25.20	Conductors of the supply cord for type Y and Z attachment adequately additionally insulated		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
25.21	Space for supply cable for fixed wiring or supply cord for type X attachment constructed to permit checking of conductors with respect to correct positioning and connection before fitting any cover, no risk of damage, no contact with accessible metal parts if a conductor becomes loose, etc.		N
	For portable appliances, the uninsulated end of a conductor prevented from any contact with accessible metal parts, unless the end of the cord is such that the conductors are unlikely to slip free		N
25.22	Appliance inlet:		---
	- live parts not accessible during insertion or removal		N
	- connector can be inserted without difficulty		N
	- the appliance is not supported by the connector		N
	- is not for cold conditions if temperature rise of external metal parts exceeds 75 K, unless the supply cord is not likely to touch such metal parts		N
25.23	Interconnection cords comply with the requirements for the supply cord, except as specified	No interconnection cords	N
	If necessary, electric strength test of 16.3		N
25.24	Interconnection cords not detachable without the aid of a tool if compliance with the standard is impaired when they are disconnected		N
25.25	Dimensions of pins compatible with the dimensions of the relevant socket-outlet. Dimensions of pins and engagement face in accordance with the relevant plug in IEC 60083		P
26	TERMINALS FOR EXTERNAL CONDUCTORS		---
26.1	Appliance provided with terminals or equally effective devices for connection of external conductors		N
	Terminals only accessible after removal of a non-detachable cover		N
26.2	Appliance with type X attachment and appliances for connection to fixed wiring provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered		N
	Screws and nuts serve only to clamp supply conductors, except		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Internal conductors, if so arranged that they are unlikely to be displaced when fitting the supply conductors		N
	If soldered connections used, the conductor so positioned or fixed that reliance is not placed on soldering alone		N
	Soldering alone used, barriers provided, clearances and creepage distances satisfactory if the conductor becomes free at the soldered joint		N
26.3	Terminals for type X attachment and for connection to fixed wiring so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor	Type Y attachment	N
	Terminals for type X attachment and those for connection to fixed wiring so fixed that when tightening or loosening the clamping means:		N
	- the terminal does not loosen		N
	- internal wiring is not subjected to stress		N
	- clearances and creepage distances are not reduced below the values in 29		N
	Compliance checked by inspection and by the test of subclause 8.6 of IEC 60999-1, the torque specified. Nominal diameter of thread (mm); screw category; torque (Nm)		N
26.4	Terminals for type X attachment, except those with a specially prepared cord, and those for connection to fixed wiring, no special preparation of conductors required, and so constructed or placed that conductors prevented from slipping out		N
26.5	Terminals for type X attachment so located or shielded that if a wire of a stranded conductor escapes, no risk of accidental connection to other parts than result in a hazard		N
	Stranded conductor test, 8mm insulation removed		N
	No contact between live parts and accessible metal parts and , for class II constructions, between live parts and metal parts separated from accessible metal parts by supplementary insulation only		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
26.6	Terminals for type X attachment and for connection to fixed wiring suitable for connection of conductors with required cross-sectional area according to table 13; rated current (A); nominal cross-sectional area (mm ²)		N
	Terminals only suitable for a specially prepared cord		N
26.7	Terminals for type X attachment accessible after removal of a cover or part of the enclosure		N
26.8	Terminals for the connection to fixed wiring , including the earthing terminal, located close to each other		N
26.9	Terminals of the pillar type shall be constructed and located so that the end of a conductor introduced into the hole is visible, or can pass beyond the threaded hole for a distance equal to half the nominal diameter of the screw but at least 2,5 mm		N
26.10	Terminals with screw clamping and screwless terminals not used for flat twin tinsel cords, unless conductors ends fitted with a device suitable for screw terminals		P
	Pull test of 5N to the connection		P
26.11	For type Y and Z attachment: soldered, welded, crimped and similar connections may be used		N
	For class II appliance: the conductor so positioned or fixed that reliance is not placed on soldering, welding or crimping alone		N
	For class II appliance: soldering, welding or crimping alone used, barriers provided, clearance and creepage distance satisfactory if the conductor become free		N
27	PROVISION FOR EARTHING		---
27.1	Accessible metal parts of Class 0I and I appliances, permanently and reliably connected to an earthing terminal		P
	Earthing terminals not connected to neutral terminal		N
	Class 0, II and III appliance have no provision for earthing	Class I appliance	N
	Safety extra-low voltage circuits not earthed, unless protective extra-low voltage circuits		N

EN 60335-2-80

Clause	Requirement + Test	Result - Remark	Verdict
27.2	Clamping means adequately secured against accidental loosening		P
	Terminals used for the connection of external equipotential bonding conductors allow connection of conductors of 2,5 to 6 mm ² , and		P
	do not provide earthing continuity between different parts of the appliance		P
	Conductors cannot be loosened without the aid of a tool		P
27.3	For appliances with supply cord, current-carrying conductors become taut before earthing conductor, if the cord slips out of the cord anchorage		P
27.4	No risk of corrosion resulting from contact between metal of earthing terminal and other metal		P
	Adequate resistance to corrosion of coated or uncoated parts providing earthing continuity, other than parts of a metal frame or enclosure		P
	Parts of steel providing earthing continuity provided at the essential areas with an electroplated coating, thickness at least 5 μm		P
	Adequate protection against rusting of parts of coated or uncoated steel, only intended to provide or transmit contact pressure		P
	In case of aluminium alloys precautions taken to avoid risk of corrosion		N
27.5	Low resistance of connection between earthing terminal and earthed metal parts		P
	This requirement does not apply to connections providing earthing continuity in the protective extra-low voltage circuit, provided that clearances of basic insulation are based on the rated voltage of the appliance		P
	Resistance not exceeding 0,1Ω at the specified low-resistance test		P
27.6	The printed conductors of printed circuit boards not used to provide earthing continuity in hand held appliances		N
	They may be used in other appliances if :		N
	- at least two tracks are used with independent soldering points and the appliance complies with requirements of 27.5 for each circuit		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- the material of the printed board complies with IEC 249-2-4 or IEC 249-2-5		N
28	SCREWS AND CONNECTIONS		---
28.1	Fixings and electrical connections withstand mechanical stresses		P
	Screws not of soft metal liable to creep, such as zinc or aluminium		P
	Diameter of screws of insulating material min. 3 mm	No insulating screws used	N
	Screws of insulating material not used for any electrical connection or connections providing earthing continuity		N
	Screws transmitting electrical contact only screwing into metal		P
	Screws not of insulating material if their replacement by a metal screw can impair supplementary or reinforced insulation		N
	Type X attachment, screws to be removed for replacement of supply cord, or for users maintenance, not of insulating material if their replacement by a metal screw can impair basic insulation		N
	For screws and nuts; test as specified		P
28.2	Contact pressure not transmitted through insulating material liable to shrink or distort, unless shrinkage or distortion compensated		N
	This requirement does not apply to electrical connections in circuits carrying a current not exceeding 0,5 A		P
28.3	Space-threaded (sheet metal) screws only used for the connection of current-carrying parts if they clamp these parts directly in contact with each other	No such screws used	N
	Thread-cutting (self-tapping) screws not used for electrical connection of current-carrying parts, unless generating a full form standard machine screw thread		N
	Thread-cutting (self-tapping) screws not used if they are likely to be operated by the user or installer unless the thread is formed by a swaging action		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Threas-cutting and space-threaded screws may be used in connections providing earthing continuity, provided unnecessary to disturb the connection and at least two screws are used for each connection		N
28.4	Screws and nuts making mechanical connection secured against loosening if they also make electrical connections or connections providing earthing continuity		N
	Rivets for electrical connections or connections providing earthing continuity secured against loosening if subjected to torsion		N
29	CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH INSULATION		---
	Clearances, creepage distances and solid insulation withstand electrical stress		P
	For coating used on printed circuit boards to protect the microenviroment or to provide basic insulation, annex J applied		N
29.1	Clearances not less than the valuses specified in table 16, taking into account the rated impulse voltage for the overvoltage categories of table 15		P
	The values specified may be smaller for basic insulation and functional insulation if the clearance meets the impulse voltage test of clause 14		N
	Appliances are in overvoltage category II		P
	Clearances less than specified in table 16 not allowed for basic insulation of class 0 and class 0I appliances,		N
	Or if pollution degree 3 is applicable		N
	Compliance is checked by inspection and measurements as specified		P
29.1.1	Clearances of basic insulation withstand the overvoltages, taking into account the rated impulse voltage		P
	Clearance at the terminals of tubular sheathed heating elements may be reduced to 1 mm if the microenvironment is pollution degree 1		N
	Lacquered conductors of winding assumed to the bare conducts, but the clearances specified in table 16 are reduced by 0.5mm for rated impulse voltages of at least 1500V		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
29.1.2	Clearances of supplementary insulation not less than those specified for basic insulation in table 16		P
29.1.3	Clearances of reinforced insulation not less than those specified for basic insulation in table 16, but using the next higher step for rated impulse voltage		P
29.1.4	For functional insulation, the values of table 16 are applicable, unless		P
	The appliance complies with clause 19 with the functional insulation short-circuited		N
	Clearances at crossover points of lacquered conductors not measured		N
	Clearance between surfaces of PTC heating elements may be reduced to 1mm		N
	Lacquered conductors of windings assumed to be bare conductors, but the clearances specified in table 16 are reduced by 0.5mm for rated impulse voltages of at least 1500V		P
29.1.5	Appliances having higher working voltage than rated voltage, the voltage used for determining clearances from table 16 is the sum of the rated impulse voltage and the difference between the peak value of the working voltage and the peak value of the rated voltage	No higher working voltage generated	N
	If the secondary winding of a step-down transformer is earthed, or if there is an earthed screen between the primary and secondary windings, clearances of basic insulation on the secondary side not less than those specified in table 16, but using the next lower step for rated impulse voltage		N
	Circuits supplied with a voltage lower than rated voltage, clearances of functional insulation based on the working voltage used as the rated voltage in table 15		N
29.2	Creepage distances not less than those appropriate for the working voltage, taking into account the material group and the pollution degree		P
	Pollution degree 2 applies, unless		P
	Precautions taken to protect the insulation; pollution degree 1		N
	Insulation subjected to conductive pollution; pollution degree 3		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by inspection and measurements as specified		P
29.2.1	Creepage distances of basic insulation shall not be less than those specified in table 17		P
	For pollution degree 1, creepage distance not less than the minimum specified for the clearance in table 16, if the clearance has been checked according to the test of clause 14		N
29.2.2	Creepage distances of supplementary insulation shall be at least those specified for basic insulation in table 17		P
29.2.3	Creepage distances of reinforced insulation shall be at least double those specified for basic insulation in table 17		P
29.2.4	Creepage distances of functional insulation shall be not less than those specified in table 18.		P
	creepage distances may be reduced if the appliance complies with clause 19 with the functional insulation short-circuited		N
29.3	Solid insulation shall have a minimum thickness of 1 mm for supplementary insulation		P
	And 2 mm for reinforced insulation		P
	This requirement does not apply if the supplementary insulation, other than mica or similar scaly material, consists of at least two layers, each of the layers withstand the electric strength test of 16.3		N
	This requirement also does not apply to inaccessible insulation and does not exceed the maximum permissible temperature values, or		N
	If the insulation, after conditioning as specified, withstands the electric strength test of 16.3		N
30	RESISTANCE TO HEAT, FIRE AND TRACKING		---
30.1	Relevant external parts of non-metallic material		P
	Parts supporting live parts and		P
	Thermoplastic material providing supplementary or reinforced insulation		N
	Sufficiently resistant to heat		P
	Ball-pressure test according to IEC 60695-10-2	(see appended table)	P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	External parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 75°C, whichever is the higher, temperature(°C):	(see appended table)	P
	Parts supporting live parts: at 40°C plus the maximum temperature rise determined during the test of clause 11, or at 125°C, whichever is the higher; temperature(°C):	(see appended table)	P
	Parts of thermoplastic material providing supplementary or reinforced insulation, 25°C plus the maximum temperature rise determined during clause 19, if higher, temperature (°C)		N
30.2	Relevant parts of non-metallic material adequately resistant to ignition and spread of fire		P
30.2.1	Glow-wire test of IEC 60695-2-11 at 550 °C Unless	(see appended table)	P
	The material is classified at least HB40 according to IEC 60695-11-10		N
	Parts for which the glow-wire test cannot be carried out meet the requirements in ISO9772 for category FH3 material		N
30.2.3	Appliances operated while unattended, tested as specified in 30.2.3.1 and 30.2.3.2		P
	Test not applicable to conditions as specified		P
30.2.3.1	Parts of insulating material supporting connections carrying a current exceeding 0.2A during normal operation, and		P
	Parts of insulating material within a distance of 3mm,		P
	Having a glow-wire flammability index of at least 850 °C according to IEC 60695-2-12		P
30.2.3.2	Parts of insulating material supporting current-carrying connections, and		P
	Parts of insulating material within a distance of 3mm,		P
	Subjected to glow-wire test of IEC 60695-2-11		P
	Test not carried out on material having a glow-wire ignition temperature according to IEC 60695-2-13 as specified		P
	Glow-wire test of IEC 60695-2-11, the temperature being		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	- 750°C, for connections carrying a current exceeding 0,2A during normal operation		P
	- 650°C, for other connections		N
	Parts that during the test produce a flame persisting longer than 2 s, tested as specified		P
	If a flame persists longer than 2 s during the test, parts above the connection, as specified, subjected to the needle-flame test of annex E, unless		P
	The material is classified as V-0 or V-1 according to IEC 60695-11-10		P
30.2.4	Base material of printed circuit boards subjected to needle-flame test of annex E		N
	Test not applicable to conditions as specified		N
30.101	Printed circuit boards supporting live parts shall be resistant to fire (EN 60335-2-80)		P
	Compliance is checked by subjecting the base material of the printed circuit board to the needle-flame test of annex M		P
	The needle-flame test is not carried out on printed circuit boards which are made of material classified as FV-0 or FV-1 according to IEC 60707. the sample of material submitted to the test of IEC 60707 shall be no thicker than the relevant part		P
31	RESISTANCE TO RUSTING		---
	Relevant ferrous parts adequately protected against rusting		P
32	RADIATION, TOXICITY AND SIMILAR HAZARDS		---
	Appliance does not emit harmful radiation		P
	Appliance does not present a toxic or similar hazard		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
A	ANNEX A (INFORMATIVE) ROUTINE TESTS		---
	Description of routine tests to be carried out by the manufacturer		P
B	ANNEX B (NORMATIVE) APPLIANCES POWERED BY RECHARGEABLE BATTERIES		---
	The following modifications to this standard are applicable for appliances powered by batteries that are recharged in the appliance	Not powered by rechargeable batteries	N
	This annex does not apply to battery chargers		N
3.1.9	Appliance operated under the following conditions:		---
	-the appliance, supplied by its fully charged battery, operated as specified in relevant part 2		N
	-the battery is charged, the battery being initially discharged to such an extent that the appliance cannot operate		N
	-if possible, the appliance is supplied from the supply mains through its battery charger, the battery being initially discharged to such an extent that the appliance cannot operate. The appliance is operated as specified in relevant part 2		N
	If the appliance incorporates inductive coupling between two parts that are detachable from each other, the appliance is supplied from the supply mains with the detachable part removed		N
3.6.2	Part to be removed in order to discard the battery is not considered to be detachable		N
5.101	Appliances supplied from the supply mains tested as specified for motor-operated appliances		N
7.1	Battery compartment for batteries intended to be replaced by the user, marked with battery voltage and polarity of the terminals		N
7.12	The instructions for appliances incorporating batteries intended to be replaced by the user includes required information		N
	Details about how to remove batteries containing materials hazardous to the environment given		N
7.15	Marking placed on the part of the appliance connected to the supply mains		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	Appliances having batteries that according to the instruction may be replaced by the user need only have basic insulation between live parts and the inner surface of the battery compartment		N
	If the appliance can be operated without batteries, double or reinforced insulation required		N
11.7	The battery is charged for the period described		N
19.1	Appliances subjected to tests of 19.101, 19.102 and 19.103		N
22.3	Appliances having pins for insertion into socket-outlets tested as fully assembled as possible		N
25.13	An additional lining or bushing not required for interconnection cords operating at safety extra-low voltage		N
30.2	For parts of the appliance connected to the supply mains during the charging period, 30.2.3 applies		N
	For other parts, 30.2.2 applies		N
C	ANNEX C (NORMATIVE) AGEING TEST ON MOTORS		---
	Tests , as described, carried out when doubt with regard to the temperature classification of the insulation of a motor winding		N
	The value of p in table C.1 is 2000(IEC 60335-1),		N
	except for the following appliances for which it is 500: bean slicers, blenders, can openers, cheese graters, citrus-fruit squeezers, graters, ice-creem machines for use in refrigerators and freezers, knife sharpeners, knives, sieving machines, shredders.		N
D	ANNEX D(NORMATIVE) ALTERNATIVE REQUIREMENTS FOR PROTECTED MOTORS		---
	Applicable to protected motors for unattended use, test of 19.7 carried out on a separate sample according to the specification		N
E	ANNEX E(NORMATIVE) NEEDLE-FLAME TEST		---
	The needle-flame test is carried out in accordance with IEC 60695-11-5 with the following modifications.		N
7	Severities		--

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	The duration of application of the test flame is 30 s \pm 1 s.		N
9	Test procedure		--
9.1	The specimen is arranged so that the flame can be applied to a vertical or horizontal edge as shown in the examples of Figure 1.		N
9.2	The first paragraph does not apply.		
	If possible, the flame is applied at least 10 mm from a corner.		
9.3	Replacement: The test is carried out on one specimen. If the specimen does not withstand the test, the test may be repeated on two additional specimens, both of which shall then withstand the test.		N
11	Evaluation of test results		--
	The duration of burning not exceeding 30s		N
	However, for printed circuit boards, the duration of burning not exceeding 15s		N
F	ANNEX F (NORMATIVE) CAPACITORS		---
	Capacitors likely to be permanently subjected to the supply voltage, and used for radio interference suppression or voltage dividing, comply with the following clauses of IEC 60384-14, with the following modifications:		N
1.5	Terminology		---
1.5.3	Class X capacitors tested according to subclass X2		N
1.5.4	This subclause is applicable		N
1.6	Marking		N
	Items a) and b) are applicable		N
3.4	Approval testing		---
3.4.3.2	Table II is applicable as described		N
4.1	Visual examination and check of dimensions		---
	This subclause is applicable		N
4.2	Electrical tests		N
4.2.1	This subclause is applicable		N
4.2.5	This subclause is applicable		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
4.2.5.2	Only table IX is applicable		N
	Values for test A apply		N
	However, for capacitors in heating appliances the values for test B or C apply		N
4.12	Damp heat, steady-state		N
	This subclause is applicable		N
	Only insulation resistance and voltage proof are checked		N
4.13	Impulse voltage		N
	This subclause is applicable		N
4.14	Endurance		N
	Subclauses 4.14.1, 4.14.3, 4.14.4 and 4.14.7 applicable		N
4.14.7	Only insulation resistance and voltage proof are checked		N
	Visual examination, no visible damage		N
4.17	Passive flammability test		N
	This subclause is applicable		N
4.18	Active flammability test		N
	This subclause is applicable		N
G	ANNEX G(NORMATIVE) SAFETY ISOLATING TRANSFORMERS		---
	The following modifications to this standard are applicable for safety isolating transformers:		N
7	Marking and instructions		---
7.1	Transformers for specific use marked with:		---
	-name, trademark or identification mark of the manufacturer or responsible vendor		N
	-model or type reference		N
17	Overload protection of transformers and associated circuits		---
	Fail-safe transformers comply with subclause 15.5 of IEC 61558-1		N
22	Construction		---
	Subclauses 19.1 and 19.1.2 of IEC 61558-2-6 are applicable		N
29	Clearances, creepage distances and solid insulation		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
29.1 and 29.2	The distances specified in items 2a, 2c and 3 in table 13 of IEC 61558-1 apply		N
H	ANNEX H(NORMATIVE) SWITCHES		---
	Switches comply with the following clauses of IEC 61058-1, as modified:		---
	-the tests of IEC 61058-1 carried out under the conditions occurring in the appliance		N
	-before being tested, switches are operated 20 times without load		N
8	Marking and documentation		---
	Switches are not required to be marked		N
	However, switches that can be tested separately from the appliance marked with the manufacturer's name or trade mark and the type reference		N
13	Mechanism		---
	The tests may be carried out on a separate sample		N
15	Not applicable		---
15.1	Not applicable		N
15.3	Applicable for full disconnection and micro-disconnection		N
17	Endurance		---
	Compliance is checked on three separate appliances or switches		N
	For 17.2.4.4, the number of cycles is 10000, unless otherwise specified in 24.1.3 of the relevant part 2 of IEC 60335		N
	Switches for operation under no load and which can be operated only by a tool and switches operated by hand that are interlocked so that they cannot be operated under load, are not subjected to the tests		N
	Subclause 17.2.5.2 is not applicable		N
	Temperature rise of the terminals not more than 30K above the temperature rise measured in clause 11 of IEC 60335-1		N
20	Clearances, creepage distances, solid insulation and coatings of rigid printed board assemblies		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	This clause is applicable to clearances and creepage distances for functional insulation, across full disconnection and micro-disconnection, as stated in table 24		N
I	ANNEX I(NORMATIVE) MOTORS HAVING BASIC INSULATION THAT IS INADEQUATE FOR THE RATED VOLTAGE OF THE APPLIANCE		---
	The following modifications to this standard are applicable for motors having basic insulation that is inadequate for the rated voltage of the appliance:		N
8	Protection against access to live parts		---
8.1	Metal parts of the motor are considered to be bare live parts		N
11	Heating		---
11.3	Temperature rise of the body of the motor is determined instead of the temperature rise of the windings		N
11.8	Temperature rise of the body of the motor, where in contact with insulating material, not exceeding values in table 3 for the relevant insulating material		N
16	Leakage current and electric strength		---
16.3	Insulation between live parts of the motor and its other metal parts not subjected to the test		N
19	Abnormal operation		---
19.1	The tests of 19.7 to 19.9 not carried out		N
22	Construction		N
J	ANNEX J(NORMATIVE) COATED PRINTED CIRCUIT BOARDS		---
	Testing of protective coatings of printed circuit boards carried out in accordance with IEC 60664-3 with the following modifications:		N
6.6	Climatic sequence		---
	When production samples are used, three samples of the printed circuit board are tested		N
6.6.1	Cold		---
	The test is carried out at -25°C		N
6.6.3	Rapid change of temperature		---
	Severity 1 is specified		N
6.8.6	Partial discharge extinction voltage		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Type A coatings not subjected to a partial discharge test		N
6.9	Additional tests		---
	This subclause is not applicable		N
K	ANNEX K(NORMATIVE) OVERVOLTAGE CATEGORIES		---
	The information on overvoltage categories is extracted from IEC 60664-1		N
	Overvoltage category is a numeral defining a transient overvoltage condition		N
	Equipment of overvoltage category IV is for use at the origin of the installation		N
	Equipment of overvoltage category III is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements		N
	Equipment of overvoltage category II is energy consuming equipment to be supplied from the fixed installation		N
	If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies		N
	Equipment of overvoltage category I is equipment for connection to circuit in which measures are taken to limit transient overvoltages to an appropriate low level		N
L	ANNEX L(INFORMATIVE) GUIDANCE FOR THE MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES		---
	Sequences for the determination of clearances and creepage distances		P
M	ANNEX M(NORMATIVE)		---
	The information on pollution degrees is extracted from IEC 60664-1		P
	Pollution		---
	The microenvironment determines the effect of pollution on the insulation, taking into account the microenvironment		P
	Means may be provided to reduce pollution at the insulation by effective enclosures or similar		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Minimum clearances specified where pollution may be present in the microenvironment		P
	Degrees of pollution in the microenvironment		---
	For evaluating creepage distances, the following degrees of pollution in the microenvironment are established:		---
	-pollution degree 1: no pollution or only dry, non-conductive pollution occurs. The pollution has no influence		N
	-pollution degree 2: only non-conductive pollution occurs, except that occasionally a temporary conductivity caused by condensation is to be except		P
	-pollution degree 3: conductive pollution occurs or dry non-conductive pollution occurs that becomes conductive due to condensation that is to be expected		P
	-pollution degree 4: the pollution generates persistent conductivity caused by conductive dust or by rain or snow		N
N	ANNEX N(NORMATIVE) PROOF TRACKING TEST		---
	The proof tracking test is carried out in accordance with IEC 60112 with the following modifications:		N
5	Test apparatus		---
5.1	Electrodes		---
	The note does not apply		N
5.4	Test solutions		---
	Test solution A is used		N
6	Procedure		---
6.3	Proof tracking test		---
	Voltage is 100V, 175V, 400V or 600V.....:		N
	Note 3 of clause 3 applies		N
	The test is carried out on five specimens		N
	In case of doubt, additional test with voltage reduced by 25V, the number of drops increased to 100		N
7	Report		---

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	The report stating if the PTI value was based on a test using 100 drops with a test voltage of (PTI-25)V		N
O	ANNEX O(INFORMATIVE) SELECTION AND SEQUENCE OF THE TESTS OF CLAUSE 30		---
	Description of tests for determination of resistance to heat and fire		P
ZA	ANNEX ZA(NORMATIVE) SPECIAL NATIONAL CONDITIONS(EN)		---
7.12	DENMARK: requirements regarding marking tag of power supply cord and connecting of earthing wire for class I appliances delivered without a plug(EN)		N
19.5	NORWAY: the test is also applicable to appliances intended to be permanently connected to fixed wiring(EN)		N
19.11.2	AUSTRIA: requirements regarding appliances having circuits which under fault conditions may cause earth-leakage currents having a d.c. component exceeding 5 mA and exceeding 20% of the total earth-leakage		N
22.2	FRANCE, NORWAY: The second paragraph of this subclause dealing with single-phase Class I appliances with heating elements is not applicable due to the supply system(EN)		N
25.6	BELGIUM, FRANCE, SPAIN, UNITED KINGDOM: plugs according to Standard Sheet C2b not allowed(EN)		N
	AUSTRIA, GERMANY, FINLAND, ICELAND, IRELAND, ITALY, LUXEMBOURG, NETHERLANDS, NORWAY, PORTUGAL, SPAIN, SWEDEN, SWITZERLAND, UNITED KINGDOM: plugs according to Standard sheet C3b not allowed (EN)		N
	DENMARK: Supply cords of single-phase portable appliances having a rated current not exceeding 13 A provided with a plug according to the following:(EN)		N
	Class I appliances: Section 107-2-DI, ed.3 1998, Standard Sheet DK2- 1a(EN)		N
	For appliances covered by a Part 2 of EN 60 335, also plugs in accordance with Section 107-2-D1, de.3, 1998, Standard Sheet C2b, C3b or C4 are allowed(EN)		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	Class II appliances: Section 107-2-D1, ed.3 1998, Standard Sheet C1b, C5, C6, DKA 2-1a and DKA 2-1b(EN)		N
	Stationary single-phase appliances, having a rated current not exceeding 13 A, and provided with a supply cord and a plug, the plug is in accordance with the requirements above(EN)		N
	Multi-phase appliances and single-phase appliances having a rated current exceeding 13 A, and provided with a supply cord and a plug, the plug is in accordance with the requirements below: (EN)		N
	Class I appliances: Section 107-2-D1, Standard Sheet DK6- 1a/EN 60309-2, Standard Sheet 2-II, 2-IV (EN)		N
	Class II appliances: Section 107-2-D1, Standard Sheet DK6- 1a/EN 60309-2, Standard Sheet 2-II, 2-IV, the earthing contact not being connected (EN)		N
	The current for the plug not exceeding the values specified; standard sheet (no.); current (A) (EN):		N
	IRELAND: Only plug according to Standard Sheets B2 and C5 allowed (see also Annex ZB) (EN)		N
	ITALY: Only plugs listed in CENELEC Report ROBT-005: 2001 allowed (EN)		N
	SPAIN: For appliances for household use, only the following plugs are allowed: (EN)		N
	according to UNE 20315: ESC 10-1b, C2b, C4, C6 or ESB 25-5b (EN)		N
	according to UNE-EN 50075 (EN)		N
	SWITZERLAND: supply cords of portable household and similar electrical appliances having a rated current not exceeding 10A, provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets: (EN)		N
	SEV 6532-2:1991 plug type 15, 3P+N+PE, 250/400 V, 10 A (EN)		N
	SEV 6533-2:1991 plug type 11, L+N, 250 V, 10 A (EN)		N
	SEV 6534-2:1991 plug type 12, L+N+PE, 250 V, 10 A (EN)		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	UNITED KINGDOM: Only plugs according to Standard Sheet B2 or C5 allowed (see also Annex ZB) (EN)		N
25.8	IRELAND, UNITED KINGDOM: replacement of figures (rated current/cross-sectional area) in the table (EN)		N
ZB	ANNEX ZB (INFORMATIVE) A-DEVIATIONS		---
4	SWITZERLAND: information about batteries with carbon-zinc and alkali-manganese (EN)		N
7.1	ITALY: the voltage is 220 V/380 V (EN)		P
25.6	IRELAND: These regulations apply to all plugs for domestic use at a voltage of not less than 200V and allow only plugs complying with I.S. 401: 1997, or equivalent, to be fitted to domestic appliances. (EN)		N
	UNITED KINGDOM: These regulations apply to all plugs for domestic use at a voltage of not less than 200V and allow only plugs to BS 1363 to be fitted to domestic appliances. It also allows plugs to BS 4573 and standard sheet C5 to be fitted to shavers and toothbrushes. (EN)		N
ZC	ANNEX ZC(NORMATIVE) NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS (EN)		---
	This standard incorporates provisions from the publications listed (EN)		P
ZD	ANNEX ZD (INFORMATIVE) IEC AND CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN)		---
	A list of code designations for different types of flexible cords (EN)		P

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict

AMENDMENT 14: 2010 TO EN 60335-1: 2002			
19	ABNORMAL OPERATION		—
19.14	Modification: Add the content of the note to the requirement as follows: If a relay or contactor with more than one contact is used, all contacts are short-circuited at the same time.		P
24	COMPONENTS		—
24.1	Replacement:		-
	Components comply with safety requirements in relevant standards		P
	the requirements of Clause 29 of this standard apply between live parts of components and accessible parts of the appliance		P
	the requirements of 30.2 of this standard apply to parts of non-metallic material in components including parts of non-metallic material supporting current-carrying connections inside components		P
	List of components	(See appended table)	P
	Components not tested and found to comply with relevant standard for the number of cycles specified are tested in accordance with 24.1.1 to 24.1.9		P
	Components not tested and found to comply with relevant standard, components not marked or not used in accordance with its marking, tested under the conditions occurring in the appliance		P
	Lampholders and starterholders that have not been previously tested and found to comply with the relevant standard are tested as a part of the appliance and shall additionally comply with the gauging and interchangeability requirements of the relevant standard under the conditions occurring in the appliance.		N
25	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORES		—
25.7	Modification: – Rubber sheathed (code designation 60245 IEC 53) These cords are not suitable for appliances intended to be used outdoors or when they are liable to be exposed to significant amounts of ultraviolet radiation.		N
26	TERMINALS FOR EXTERNAL CONDUCTORS		—

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
26.2	Modification: Change NOTE into requirement: Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain it in position unless they are held in place near the terminals independently of the solder.		P
26.11	Modification: Change NOTE into requirement: Conductors connected by soldering are not considered to be positioned or fixed so that reliance is not placed upon the soldering alone to maintain it in position unless they are held in place near the terminals independently of the solder.		P
29	CLEARANCES, CREEPAGE DISTANCES AND SOLID INSULATION		—
29.1	Replacement: NOTE 6 Attention is drawn on the fact that for appliances intended for use at altitudes exceeding 2 000 m, the altitude correction factors, relevant to the intended altitude, for clearances specified in Table A.2 of EN 60664-1 may need to be taken into account.		N
29.2	Modification: Change NOTE 6 into a requirement. In a double insulation system, the working voltage for both the basic insulation and supplementary insulation is taken as the working voltage across the complete double insulation system. It is not divided according to thickness and dielectric constant of the basic insulation and supplementary insulation.		N
32	RADIATION, TOXICITY AND SIMILARHAZARDS		—
	Addition: Compliance regarding electromagnetic fields is checked according to EN 50366 or EN 62233.		P
ZE	Specific additional requirements for appliances and machines intended for commercial use		N
7.1	-business name and full address of the manufacturer and, where applicable, his authorized representative;		N
	-model or type reference, serial number, if any, and production year;		N
7.12	Instructions shall be provided with the appliance so that the appliance can be used safely.		N
	The instructions shall contain at least the following information:		—

EN 60335-2-80

Clause	Requirement + Test	Result - Remark	Verdict
	the business name and full address of the manufacturer and, where applicable, his authorized representative;		N
	model or type reference of the appliance as marked on the appliance itself, except for the serial number;		N
	the designation of the appliance together with its explanation in case it is given by a combination of letters and/or numbers.		N
	the general description of the appliance, when needed due to the complexity of the appliance;		N
	specific precautions if required during installation, operation, adjusting, user maintenance, cleaning, repairing or moving;		N
	when needed drawings, diagrams, descriptions and explanations necessary for the safe use and user maintenance of the appliance;		N
	the possible reasonably foreseeable misuse and, whenever relevant, a warning against the effects it may have on the safe use of the appliance;		N
	The words "Original instructions" shall appear on the language version(s) verified by the manufacturer or by the authorized representative.		N
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible shall be fitted with:		—
	— fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work; and		N
	— adjustable guards restricting access to those sections of the moving parts where access is necessary.		N
	Interlocking movable guards (e.g. the door of a washing machine) shall be used where frequent access is required.		N
21.1	Appliances and their components and fittings shall have adequate mechanical strength and be constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance.		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
22.ZE.1	For appliances provided with a seat, the seat has to give adequate stability. The distance between the seat and the control devices shall be capable of being adapted to the operator.		N
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function shall be unambiguously identifiable and shall always override the start function.		N
	For appliances provided with one device performing the start and the stop function, the stop function shall be unambiguously identifiable and shall always override the start function.		N
22.ZE.3	Appliances shall be designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation. If this is not possible, information on the correct mounting shall be given directly on the part and/or the enclosure.		N
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they shall be fitted with attachments for lifting gear or be designed so they can be fitted with such attachments, or be shaped in such a way that standard lifting gear can easily be used.		N
	Appliances to be moved manually shall be constructed or shall be equipped so that they can be moved easily and safely.		N
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts shall only be removable with the use of tools.		N
	If such guards have to be removed frequently their fixing systems shall remain attached to the fixed guards or to the machine after removal. Where possible, guards shall be incapable of remaining in place without their fixings		N
	When a translation of the original instructions has been provided by a person introducing the appliance on the market; the meaning of the sentence "Translation of the original instructions" has to appear in the relevant instructions delivered with the appliance.		N
	The instructions for maintenance/service to be done by specialized personnel, mandated by the manufacturer or the authorized representative may be supplied in only one Community language which the specialized personnel understand.		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	The instructions shall indicate the type and frequency of inspections and maintenance required for safe operation including the preventive maintenance measures.		N
7.12.Z1	Wherever needed for specific appliances, information shall be given:		—
	on use, transportation, assembly, dismantling when out of service, testing or foreseeable breakdowns, if these operations have consequences on stability of the appliance in order to avoid overturning, falling or uncontrolled movements of the appliance or of its component parts;		N
	on how to maintain adequate mechanical stability when in use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance;		N
	on the protective measures to be taken by the user, including, where appropriate, the personal protective equipment to be provided;		N
	on the operating method to be followed in the event of accident or breakdown; if a blockage is likely to occur the operating method to safely unblock the appliance;		N
	on the specifications on the spare parts to be used, when these affect the health and safety of the operator;		N
	on airborne noise emissions, determined and declared in accordance with the relevant Part 2.		N
19.11.4.8	The appliance shall continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage fluctuation occurred, or a manual operation shall be required to restart it.		N
20.1	Appliances and their components and fittings shall have adequate mechanical stability during transportation, assembly, dismantling and any other action involving the appliance.		N
20.2	Dangerous moving transmission parts shall be safeguarded either by design or guards. When guards are used, they shall be fixed guards, interlocking movable guards or protective devices.		N
	Moving parts directly involved in the function of the appliance which cannot be made completely inaccessible shall be fitted with:		—

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
	— fixed guards or interlocking movable guards preventing access to those sections of the parts that are not used in the work; and		N
	— adjustable guards restricting access to those sections of the moving parts where access is necessary.		N
	Interlocking movable guards (e.g. the door of a washing machine) shall be used where frequent access is required.		N
21.1	Appliances and their components and fittings shall have adequate mechanical strength and be constructed to withstand such rough handling that may be expected in normal use, during transportation, assembly, dismantling, scrapping and any other action involving the appliance.		N
22.ZE.1	For appliances provided with a seat, the seat has to give adequate stability. The distance between the seat and the control devices shall be capable of being adapted to the operator.		N
22.ZE.2	For appliances provided with separate devices for the start and the stop functions, the stop function shall be unambiguously identifiable and shall always override the start function.		N
	For appliances provided with one device performing the start and the stop function, the stop function shall be unambiguously identifiable and shall always override the start function.		N
22.ZE.3	Appliances shall be designed in such a way that incorrect mounting is avoided, if this can lead to an unsafe situation. If this is not possible, information on the correct mounting shall be given directly on the part and/or the enclosure.		N
22.ZE.4	Where the weight, size or shape prevents appliances from being moved manually, they shall be fitted with attachments for lifting gear or be designed so they can be fitted with such attachments, or be shaped in such a way that standard lifting gear can easily be used.		N
	Appliances to be moved manually shall be constructed or shall be equipped so that they can be moved easily and safely.		N
22.ZE.5	The fixing systems of fixed guards which prevent access to dangerous moving transmission parts shall only be removable with the use of tools.		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict

	If such guards have to be removed frequently their fixing systems shall remain attached to the fixed guards or to the machine after removal. Where possible, guards shall be incapable of remaining in place without their fixings		N
	This does not apply if, after removal of the screws, or if the component is incorrectly repositioned, the appliance becomes inoperative.		N
	If movable guards are interlocked, the interlocking devices shall prevent the start of hazardous appliance functions until the guards are fixed in their position, and give a stop command whenever they are no longer closed		N
	Where it is possible for an operator to reach the danger zone before the risk due to hazardous appliance functions has ceased, movable guards shall be associated with a guard locking device in addition to an interlocking device that:		—
	— prevents the start of hazardous appliance functions until the guard is closed and locked, and		N
	— keeps the guard closed and locked until the risk of injury from the hazardous appliance functions has ceased.		N
	Interlocking movable guards shall remain attached to the appliance when open and they shall be designed and constructed in such a way that they can be adjusted only by means of an intentional action.		N
	Interlocking movable guards shall be designed in such a way that the absence or failure of one of their components prevents starting or stops the hazardous appliance functions.		N
	Adjustable guards restricting access to those areas of the moving parts strictly necessary for the work shall be:		—
	— adjustable manually or automatically, depending on the type of work involved, and		N
	— readily adjustable without the use of tools.		N

EN 60335-2-80			
Clause	Requirement + Test	Result - Remark	Verdict
22.ZE.6	In case of interruption, re-establishment after an interruption or fluctuation in whatever manner of the power supply, the appliance shall not restart, however automatic restarting of the operation is allowed if the appliance may continue to operate, without causing any hazard to the user, from the same point in its operating cycle at which the voltage interruption or fluctuation occurred.		N
Annex ZF	Criteria applied for the allocation of products covered by standards in the EN 60335 series under LVD or MD		P
Annex ZZ	Coverage of Essential Requirements of EC Directives		P

10.1	TABLE: INPUT DEVIATION MEASUREMENTS					P
input deviation dP of/at:	Prated (W)	P (W)	dP	required dP	remark	
380V, 50Hz	250	238	-4.8%	+20%	P	

11.8	TABLE: TEMPERATURE RISE MEASUREMENTS			P
	room temperature t1 (°C)		24,7	--
	room temperature t2 (°C)		24,8	--
	test voltage (V)		AC380Vx1.06	--
temperature rise dT of part/at:			dT (K)	required dT (K)
Plug			4.5	50
Supply cord			8.4	50
Metal enclosure			5.6	60
Electric relay			22.6	85
Motor			35.4	--
Internal wire			21.8	55
Data line			3.9	55

11.8	TABLE: TEMPERATURE RISE MEASUREMENTS					N
	room temperature t1 (°C)				---	
	room temperature t2 (°C)				---	
	test voltage (V)				---	
temperature rise of winding:		R ₁ (Ω)	R ₂ (Ω)	dT (K)	required dT (K)	insulation class
		-	-	-	-	-

13.2	TABLE: LEAKAGE CURRENT			P
	Heating appliances: at 1,15 times maximum rated input (W)			---
	Motor-operated and combined appliances: at 1,06 times rated voltage (V)		380Vx1.06	---
leakage current I between:			I (mA)	Required I (mA)
L and accessible metal parts			0,15	3,5

N and accessible metal parts	0,15	3,5

13.3	TABLE: ELECTRIC STRENGTH		P
test voltage applied between:		Test voltage (V)	Breakdown (Yes/No)
Live parts and enclosure		1906	No

16.2	TABLE: LEAKAGE CURRENT MEASUREMENTS		P
at 1,06 times rated voltage (V)		380Vx1.06	--
leakage current I between:		I (mA)	required I (mA)
L to enclosure		0,15	3,5
N to enclosure		0,15	3,5

16.3	TABLE: ELECTRIC STRENGTH		P
test voltage applied between:		Test voltage (V)	Breakdown (Yes/No)
Live parts and enclosure		1906	No

17	TABLE: OVERLOAD PROTECTION, TEMPERATURE RISE		N
temperature rise dT of part/at:		dT (K)	required dT (K)

19.7	TABLE: Abnormal operation, locked rotor/moving parts				P
Test voltage(V).....		380Vx1.06		--	
Ambient, t ₁ (°C)		23,5		--	
Ambient, t ₂ (°C).....		23,5		--	
Temperature of winding	R1(Ω)	R2(Ω)	dT(K)	T(°C)	Max. T(°C)
Motor of fan	---	---	---	68.7	150
Remark:					

19.13	TABLE: ABNORMAL OPERATION, TEMPERATURE RISES	N
Termocouple locations	dT (K)	Max. dT (K)

24.1	TABLE: COMPONENTS					P
object/part No.	manufacturer/trade mark	type/model	technical data	standard	mark(s) of conformity ¹⁾	
Plug	Zhejiang Jinting Nuclear Cable Co.,Ltd.	JT008	16A, 250V~		VDE 40050831	
Supply cord	Zhejiang Jinting Nuclear Cable Co.,Ltd.	H03VV-F	3*0.5mm ²		VDE 40013419	
Power supply cord set	Ningbo Biaoda Electric Co., Ltd.	BD03	AC 250V, 16A		VDE 40034335	
Wire connector	HEAVY POWER CO LTD	PA 16	330V, 150 °C		VDE 40015628	
PCB	Shenzhen Jia Li Chuang Technology Development Co LTD	JLC-1	Multilayer printed wiring board, V-0, 130°C		E479892	
PCB	Kingboard Laminates Holdings Ltd	KB-5150, KB-5150&, KB-5252	V-0, 130°C min. thickness: 1.6mm		E123995	
Alternative	Shandong Jinbao Electronics Co Ltd	ZD-95(G)F4, ZD-68(G)F1	V-0, 130°C min. thickness: 1.6mm		E141940	
Alternative	Dongguan De-Line Technology Co Ltd	ML-407	V-0, 130°C min. thickness: 1.6mm		E93995	
Alternative	Goldenmax International Technology (Zhuhai) Ltd	GF432, ILM-R1, GDM-R1	V-0, 130°C min. thickness: 1.6mm		E330731	
Alternative	HUIZHOU KEDISHENG TECHNOLOGY CO LTD		V-0, 130°C min. thickness: 1.6mm		E312490	
Data line	DONGGUAN SALIPT CO LTD	S-901-600	600V, 125°C		E209436	

Internal wire	DONGGUAN ZHIHE ELECTRICAL CABLE TECH CO LTD	2468	26AWG, VW-1, 80°C, 300V	E258239
Plastic material	CHI MEI CORPORATION	PC-60D(b)(a)	PC, V-0, RTI=130°C, min 1.0mm thickness	E56070
Metal enclosure	Various	Various	Min 1.5mm thickness	NR
1) an asterisk indicates a mark which assures the agreed level of surveillance				

29.1	TABLE: CLEARANCES					P
	OVERVOLTAGE CATEGORY.....:			II		
	Type of insulation					
Rated impulse voltage(V)	Min. cl (mm)	Basic	Functional	Supplementary	Reinforced	Remark
330	0.5					
500	0.5					
800	0.5					
1500	1.0					
2500	2.0	>2mm	>2mm	>2mm		P
4000	3.5				>3,5mm	P
6000	6.0					
8000	8.5					
10000	11.5					

29.2	TABLE: creepage distances, basic, supplementary and reinforced insulation								P	
Working voltage(V)	Creepage distance (mm) Pollution degree							Type of insulation		
	1	2			3					
		Material group			Material group					
		I	II	IIIA /IIIB	I	II	IIIA/IIIB	B) S) R)		Verdict
=50	0.2	0.6	0.9	1.2	1.5	1.7	<u>1.9</u>			P
=50	0.2	0.6	0.9	1.2	1.5	1.7	<u>1.9</u>			P
=50	0.4	1.2	1.8	2.4	3.0	3.4	<u>3.8</u>			P
>50 and =125	0.3	0.8	1.1	1.5	1.9	2.1	2.4			
>50 and =125	0.3	0.8	1.1	1.5	1.9	2.1	2.4			
>50 and =125	0.6	1.6	2.2	3.0	3.8	4.2	4.8			



Report No.: ATJC23080380002000S

>125 and =250	0.6	1.3	1.8	2.5	3.2	3.6	4.0				
>125 and =250	0.6	1.3	1.8	2.5	3.2	3.6	4.0				
>125 and =250	1.2	2.6	3.6	5.0	6.4	7.2	8.0				
>250 and =400	1.0	2.0	2.8	4.0	5.0	5.6	6.3				
>250 and =400	1.0	2.0	2.8	4.0	5.0	5.6	6.3				
>250 and =400	2.0	4.0	5.6	8.0	10.0	11.2	12.6				
>400 and =500	1.3	2.5	3.6	5.0	6.3	7.1	8.0				
>400 and =500	1.3	2.5	3.6	5.0	6.3	7.1	8.0				
>400 and =500	2.6	5.0	7.2	10.0	12.6	14.2	16.0				
>500 and =800	1.8	3.2	4.5	6.3	8.0	9.0	10.0				
>500 and =800	1.8	3.2	4.5	6.3	8.0	9.0	10.0				
>500 and =800	3.6	6.4	9.0	12.6	16.0	18.0	20.0				
>800 and =1000	2.4	4.0	5.6	8.0	10.0	11.0	12.5				
>800 and =1000	2.4	4.0	5.6	8.0	10.0	11.0	12.5				
>800 and =1000	4.8	8.0	11.2	16.0	20.0	22.0	25.0				
>1000 and =1250	3.2	5.0	7.1	10.0	12.5	14.0	16.0				
>1000 and =1250	3.2	5.0	7.1	10.0	12.5	14.0	16.0				
>1000 and =1250	6.4	10.0	14.2	20.0	25.0	28.0	32.0				
>1250 and =1600	4.2	6.3	9.0	12.5	16.0	18.0	20.0				
>1250 and =1600	4.2	6.3	9.0	12.5	16.0	18.0	20.0				
>1250 and =1600	8.4	12.6	18.0	25.0	32.0	36.0	40.0				
>1600 and =2000	5.6	8.0	11.0	16.0	20.0	22.0	25.0				
>1600 and =2000	5.6	8.0	11.0	16.0	20.0	22.0	25.0				
>1600 and =2000	11.2	16.0	22.0	32.0	40.0	44.0	50.0				
>2000 and =2500	7.5	10.0	14.0	20.0	25.0	28.0	32.0				
>2000 and =2500	7.5	10.0	14.0	20.0	25.0	28.0	32.0				
>2000 and =2500	15.0	20.0	28.0	40.0	50.0	56.0	64.0				
>2500 and =3200	10.0	12.5	18.0	25.0	32.0	36.0	40.0				
>2500 and =3200	10.0	12.5	18.0	25.0	32.0	36.0	40.0				
>2500 and =3200	20.0	25.0	36.0	50.0	64.0	72.0	80.0				
>3200 and =4000	12.5	16.0	22.0	32.0	40.0	45.0	50.0				
>3200 and =4000	12.5	16.0	22.0	32.0	40.0	45.0	50.0				
>3200 and =4000	25.0	32.0	44.0	64.0	80.0	90.0	100.0				
>4000 and =5000	16.0	20.0	28.0	40.0	50.0	56.0	63.0				
>4000 and =5000	16.0	20.0	28.0	40.0	50.0	56.0	63.0				
>4000 and =5000	32.0	40.0	56.0	80.0	100.0	112.0	126.0				

Shenzhen An-Teng Testing Service Co., Ltd

Floor 5, No. 11, Hebei Industrial Zone, Hualian Community, Longhua Street, Longhua District, Shenzhen, China
 Tel: 86-755-27724522 Fax: 86-755-27724533 Web: www.antenglab.com

>5000 and =6300	20.0	25.0	36.0	50.0	63.0	71.0	80.0		
>5000 and =6300	20.0	25.0	36.0	50.0	63.0	71.0	80.0		
>5000 and =6300	40.0	50.0	72.0	100.0	126.0	142.0	160.0		
>6300 and =8000	25.0	32.0	45.0	63.0	80.0	90.0	100.0		
>6300 and =8000	25.0	32.0	45.0	63.0	80.0	90.0	100.0		
>6300 and =8000	50.0	64.0	90.0	126.0	160.0	180.0	200.0		
>8000 and =10000	32.0	40.0	56.0	80.0	100.0	110.0	125.0		
>8000 and =10000	32.0	40.0	56.0	80.0	100.0	110.0	125.0		
>8000 and =10000	64.0	80.0	112.0	160.0	200.0	220.0	250.0		
>10000 and =12500	40.0	50.0	71.0	100.0	125.0	140.0	160.0		
>10000 and =12500	40.0	50.0	71.0	100.0	125.0	140.0	160.0		
>10000 and =12500	80.0	100.0	142.0	200.0	250.0	280.0	320.0		

*) , B = Basic , S = Supplementary and R = Reinforced

29.2	TABLE: creepage distances, functional insulation							P
Working voltage(V)	Creepage distance (mm) Pollution degree							verdict / remark
	1	2			3			
	Material group			Material group				
	I	II	III a / III b	I	II	III a / III b		
=50	0.2	0.6	0.8	1.1	1.4	1.6	1.8	P
>50 and = 125	0.3	0.7	1.0	1.4	1.8	2.0	2.2	
>125 and = 250	0.4	1.0	1.4	2.0	2.5	2.8	3.2	
>250 AND = 400	0.8	1.6	2.2	3.2	4.0	4.5	5.0	
>400 AND = 500	1.0	2.0	2.8	4.0	5.0	5.6	6.3	
>500 AND = 800	1.8	3.2	4.5	6.3	8.0	9.0	10.0	
>800 AND = 1000	2.4	4.0	5.6	8.0	10.0	11.0	12.5	
>1000 AND =1250	3.2	5.0	7.1	10.0	12.5	14.0	16.0	
>1250 AND = 1600	4.2	6.3	9.0	12.5	16.0	18.0	20.0	
>1600 AND = 2000	5.6	8.0	11.0	16.0	20.0	22.0	25.0	
>2000 AND = 2500	7.5	10.0	14.0	20.0	25.0	28.0	32.0	
>2500 AND = 3200	10.0	12.5	18.0	25.0	32.0	36.0	40.0	
>3200 AND = 4000	12.5	16.0	22.0	32.0	40.0	45.0	50.0	
>4000 AND = 5000	16.0	20.0	28.0	40.0	50.0	56.0	63.0	
>5000 AND = 6300	20.0	25.0	36.0	50.0	63.0	71.0	80.0	
>6300 AND = 8000	25.0	32.0	45.0	63.0	80.0	90.0	100.0	



Report No.: ATJC23080380002000S

>8000 AND = 10000	32.0	40.0	56.0	80.0	100.0	110.0	125.0	
>10000 AND = 12500	40.0	50.0	71.0	100.0	125.0	140.0	160.0	

30.1	TABLE: BALL-PRESSURE TESTS			P
part	test temperature (°C)		impression diameter (mm)	
Plastic material	75		1.15	

30.2	TABLE: GLOW-WIRE TESTS			P
part	Test temperature (°C)	Ignition	Remarks	
Plastic material	750	No	P	

EN 62233: 2008			
Measurement methods for electromagnetic fields of household appliances and similar apparatus with regard to human exposure			
Clause	Requirement + Test	Result - Remark	Verdict
5	Measuring methods		---
5.1	Electric fields		P
	If appliances, with their internal transformer or electronic circuit, are working at voltage lower than 1000V, they are deemed to comply without testing		P
5.2	Frequency range		P
	The frequency range considered is from 10Hz to 400KHz		P
5.3	Measuring distances, positions and operating mode		P
	The measuring distances, sensor locations and operating conditions are specified in Annex A		P
5.4	Magnetic fields sensor		P
5.5	Measuring procedures for magnetic fields	Time domain evaluation	P
5.7	Model.....	DVR 280T	P
	Rated voltage (V).....	380Vac	P
	Measuring equipment.....	Magnetic field probe 100cm ² Exposure level tester	P
	Measuring distance(cm).....	30cm	P
	Sensor location.....	Top, Front	P
	Operating conditions.....	Continuously, door closed, lowest temperature setting, cabinet empty, measure after steady condition have been reached	P
	Coupling factor.....	0.18	P
	Test duration.....	Until steady condition	P
	Measurement uncertainty (U).....		N
	The weighted result W.....	5.46%	P

Appendix 1
Photo documentation

<p>Photo 1</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	---

<p>Photo 2</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	--

Photo 3

View:

- Front
- Rear
- Right side
- Left side
- Top
- Bottom
- Internal



---END---